


Q1 SMART POS

User Manual v1.1

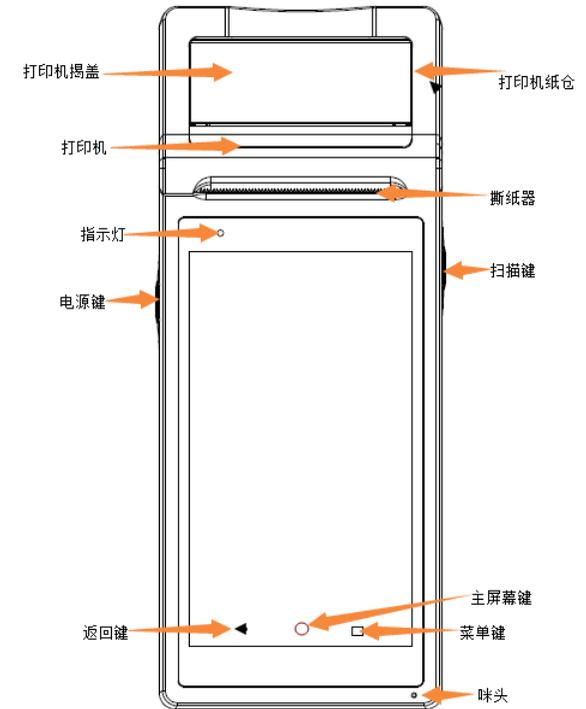

1. Power Button:

Short Press: Turn-on Screen / Turn-off & Lock Screen

Hold Down: Hold down the power button 3-5 seconds to Power on the Q1 / Shut down or Restart the Q1

Note: If the machine hanged or no response, please hold down the power button for 10 seconds to Restart.

2. Scan Button:

To work the 1D scanner which build-in at the rear of Q1.

Quality + Zoetic = Success

3. Return Key


Return to previous operator interface.

4. Main Screen Key:

Hide all windows and show the main screen.

5. Menu Key:

Have a quick view and get list of the operating Apps. You can choose or close the Apps.

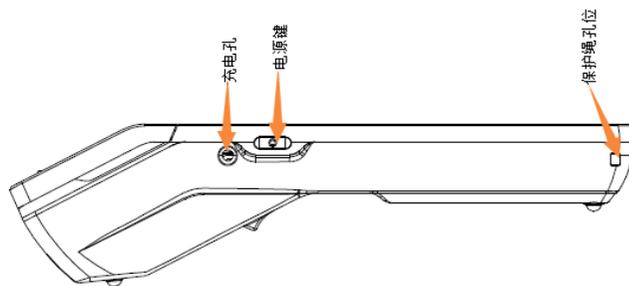

6. Charge Socket:

External diameter: 3.5mm,
Internal diameter: 1.35mm,
Input: 12V / 1.0A.


The Q1 supports power charge by this socket only, do not support

charge by USB. When power charging, screen would show the battery charging logo. If you do not get this logo after you connect the power adapter, please check all connections carefully.

Warning: Charging by Non Specified power adapter is forbidden.

7. Phone Out:

This socket allows you to connect an earphone or external loudspeaker.

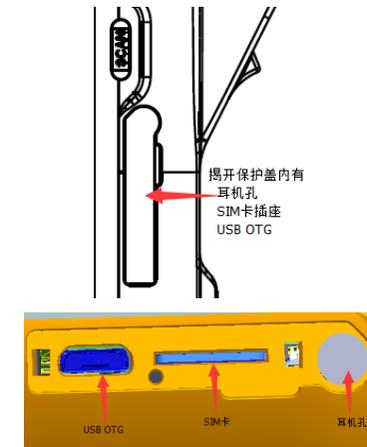

8. SIM Card Slot:


Supports Micro card, 4G / 3G network.

Warning: Please shut down the Q1 before insert SIM card, otherwise the card slot would be damaged.

9. Camera:


5,000,000 Pixel fixed focus camera. Supports mobile phone

scavenging payment and 2D code scanned. 15CM is the best distance.

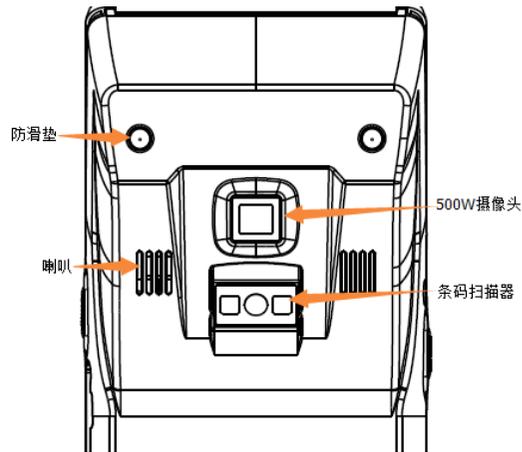

10. CCD Scanner:

This device is option & is able to scan 1D barcode. This device would be very convenient for courier, store cashier & stocktaking.

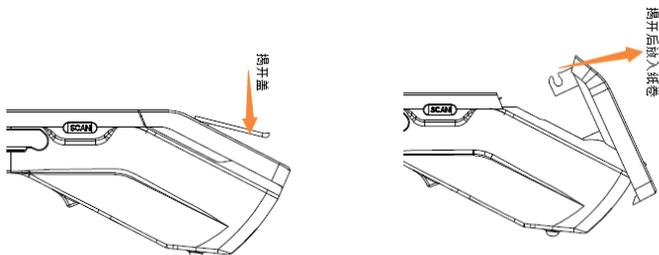

11. Receipt Printer

This is the 58mm high speed Thermal Receipt Printer, which supports label print. Paper diameter is 57 x 40 mm

To change paper, please open the paper cover, put in the thermal paper or thermal label, keeps a small part of paper out of the paper slot, and close the paper cover.

Settings

The setting of Q1 is similar to our mobile phone.

1. 4G / 3G setting: Please shut down the machine first, open the cover at the right side, insert the Micro SIM card and close the cover. Turn on the Q1 and the O/S will recognize the SIM card directly.
2. WIFI setting: Enter the setting menu, turn on WLAN and get into the WLAN setting, choose the connection and input the password. After verification, the connection can be used.

touch in “Touch Screen” section.

Common Trouble Shooting:

1. Printer not working:

Please ensure the paper cover is closed well & whether the paper has been stretched out through the paper cutter.

If paper feed normally but print nothing, please check whether the paper put in the opposite directions.

2. Scanner work abnormally:

Please initialize the setting by scan the initialize barcode.

3. Touch incorrectly:

Enter the setting menu, choose “Display” submenu and calibrate the

Technical Spec:

Item	Spec
O/S	Android 6.0
CPU	4 Core Cortex A53 1.25G Hz / 4 Core MTK80 1.3GHz
RAM	1GB DDR3/ 2GB (Option)
Flash	4GB Nand Flash/ 8GB (Option)
Display	5.5" HD Screen, Highest Resolution 1280 x 720
Touch	G+F Capacitive Multi-Touch
Camera	5,000,000 Fixed Focus
Scanner	1D CCD Scanner (Option)
Network	GSM900/1800 WCDMA2100 TD-SCDMA:B34 B39/ FDD-LTE:B1 B3 / TDD-LTE:B38 B39 B40 B41
Bluetooth	Bluetooth 4.0
WIFI	WIFI 802.11 b.g.n
Speaker	1W Single Channel
Microphone	MIC Input
Button	Power button, Scan Button
I/O	Charging Socket, USB, SIM Slot
Battery	7.4V / 5000mAh

Printer	58mm Thermal Receipt Printer, Printing Speed 50mm/S, Work Life 50 Km
Paper Roll	Max Diameter 42mm
Power Adapter	Input: 100-240V/1.5A 50/60Hz Output: 12V 1A
Dimension	209.2mm (L) x 87.4mm (W) x 51.7mm (H)

Packing Contents:

Q1 x 1 Unit
User Manual x 1
Power Adapter x 1

Warning:

In order to avoid damages or dangerous, **Nonprofessional Personnel** is not allowed to open the device, power adapter and related accessories. As this is the Wireless device, you are suggested not to use it nearby the medical devices.

When you found overheat, smoke or abnormal smell, please shut down the device immediately.

When charging paper, please pay attention to the serrated device to avoid hand scratched.

If possible, please put on a safety protection rope to prevent the machine from falling and damaged.

Disclaimer:

JP Co., Ltd has the right of interpretation for this document, and the right to amend this specification without prior notice

Manufacturer: Xiamen Jingpu Electronic Technology Co., Ltd.

www.xmjprt.com www.xmjprinter.com